





Tree No.	Species	Trunk Caliper	Existing and Potential Root Growth Conflicts	Overall Tree Health and Conditions
24	Green Ash	17"	Major - major upheaval of sidewalk, encroachment into sidewalk, exposed roots, future worsening of heaving and curb displacement likely due to inadequate tree pit dimensions, provides insufficient space for reconstructed sidewalk	Poor - branching conflicts with overhead wires, health of tree is declining, central branches out to accommodate overhead wires, tree is leaning [growing over roadway and parking lot posing significant safety hazard, large trunk cavity on main trunk, trunk damage observed at base of tree, tree is too large for area
25	Hawthorne	8"	Minor - minor upheaval of sidewalk, future worsening of heaving and curb displacement likely due to inadequate tree pit dimensions	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
26	Hawthorne	7"	Minor - minor upheaval of sidewalk, future worsening of heaving and curb displacement likely due to inadequate tree pit dimensions	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
27	Hawthorne	8"	None - future heaving and curb displacement likely due to inadequate tree pit dimensions	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
28	Hawthorne	8"	None - future heaving and curb displacement likely due to inadequate tree pit dimensions	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
29	Norway Maple	15"	Moderate - gridded roots, exposed roots, future heaving likely due to proximity of tree to sidewalk	Fair - branching conflicts with overhead wires, some central branches out to accommodate overhead wires, requires pruning to meet ADA branching height requirements at sidewalk
30	Norway Maple	15"	Moderate - gridded roots, exposed roots, future heaving and curb displacement likely due to limited plant bed width	Poor - branching conflicts with overhead wires, health of tree is declining, central branches out to accommodate overhead wires, tree has been heavily pruned to remove dead wood, may require pruning to meet ADA branching height requirements at sidewalk, tree may be near end of normal life cycle
31	Crimson King Norway Maple	12"	None - future heaving likely due to proximity of tree to sidewalk	Good [Fair] - branching conflicts with overhead wires, requires pruning to meet ADA branching height requirements at sidewalk
32	Norway Maple	17"	Minor - curb displacement, future heaving and worsening of curb displacement likely due to limited plant bed width, potential conflict with sewer manhole	Poor - branching conflicts with overhead wires, health of tree is declining, central branches out to accommodate overhead wires, some prior trunk damage observed, weak limbs unions observed creating higher likelihood of limb breakage or structural failure, tree may be near end of normal life cycle
33	Crimson King Norway Maple	12"	Minor - gridded roots, exposed roots, future heaving likely due to proximity of tree to sidewalk	Good [Fair] - branching conflicts with overhead wires, requires pruning to meet ADA branching height requirements at sidewalk

Tree No.	Species	Trunk Caliper	Existing and Potential Root Growth Conflicts	Overall Tree Health and Conditions
34	Norway Maple	21"	Moderate - gridded roots, exposed roots, future heaving and curb displacement likely due to limited plant bed width	Fair - branching conflicts with overhead wires, health of tree is declining, central branches out to accommodate overhead wires, tree is leaning [growing over roadway and parking lot posing significant safety hazard, large trunk cavity on main trunk, trunk damage observed at base of tree, tree is too large for area]
35	Kwanan Cherry	18"	Moderate - moderate upheaval of sidewalk, gridded roots, exposed roots, future worsening of heaving likely due to proximity of tree to sidewalk	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
36	Norway Maple	19"	None	None
37	Kwanan Cherry	16"	None - future heaving likely due to proximity of tree to sidewalk	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
38	Red Maple	11"	Moderate - gridded roots, exposed roots, encroachment into roadway, may provide insufficient space for future sidewalk or curbing	Fair - branching conflicts with overhead wires, health of tree is declining, central cavity on main trunk and branches observed, location of tree inside the distance at intersection
39	Red Maple	9"	Minor - exposed roots, may provide insufficient space for future sidewalk	Good [Fair] - health of tree is declining, dead branches observed, weak limbs unions observed creating higher likelihood of limb breakage or structural failure
40	Norway Maple	12"	None - may provide insufficient space for future sidewalk	Fair - dead branches observed, cavity on main trunk, trunk damage observed
41	Red Maple	7"	None - may provide insufficient space for future sidewalk	Good [Fair] - cavity on branches observed
42	Red Maple	11"	Minor - exposed roots, may provide insufficient space for future sidewalk	Good [Fair] - tree is leaning [growing over roadway posing significant safety hazard, cavity on main trunk observed, trunk damage observed, spaced in crown for weak limbs unions creating higher likelihood of limb breakage or structural failure, tree too large for area]
43	Silver Maple	49"	Major - major upheaval of adjacent ground, encroachment into roadway and sidewalk, sidewalk removal performed, exposed roots, curb displacement, future worsening of heaving likely due to inadequate tree pit dimensions, provides insufficient space for reconstructed sidewalk or curbing	Good [Fair] - tree is leaning [growing over roadway posing significant safety hazard, cavity on main trunk observed, trunk damage observed, spaced in crown for weak limbs unions creating higher likelihood of limb breakage or structural failure, tree too large for area]

Tree No.	Species	Trunk Caliper	Existing and Potential Root Growth Conflicts	Overall Tree Health and Conditions
34	Norway Maple	21"	Moderate - gridded roots, exposed roots, future heaving and curb displacement likely due to limited plant bed width	Fair - branching conflicts with overhead wires, health of tree is declining, central branches out to accommodate overhead wires, tree is leaning [growing over roadway and parking lot posing significant safety hazard, large trunk cavity on main trunk, trunk damage observed at base of tree, tree is too large for area]
35	Kwanan Cherry	18"	Moderate - moderate upheaval of sidewalk, gridded roots, exposed roots, future worsening of heaving likely due to proximity of tree to sidewalk	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
36	Norway Maple	19"	None	None
37	Kwanan Cherry	16"	None - future heaving likely due to proximity of tree to sidewalk	Good [Fair] - branching conflicts with overhead wires, thinned tree species are dangerous and inappropriate for sidewalk areas, may require pruning to meet ADA branching height requirements at sidewalk
38	Red Maple	11"	Moderate - gridded roots, exposed roots, encroachment into roadway, may provide insufficient space for future sidewalk or curbing	Fair - branching conflicts with overhead wires, health of tree is declining, central cavity on main trunk and branches observed, location of tree inside the distance at intersection
39	Red Maple	9"	Minor - exposed roots, may provide insufficient space for future sidewalk	Good [Fair] - health of tree is declining, dead branches observed, weak limbs unions observed creating higher likelihood of limb breakage or structural failure
40	Norway Maple	12"	None - may provide insufficient space for future sidewalk	Fair - dead branches observed, cavity on main trunk, trunk damage observed
41	Red Maple	7"	None - may provide insufficient space for future sidewalk	Good [Fair] - cavity on branches observed
42	Red Maple	11"	Minor - exposed roots, may provide insufficient space for future sidewalk	Good [Fair] - tree is leaning [growing over roadway posing significant safety hazard, cavity on main trunk observed, trunk damage observed, spaced in crown for weak limbs unions creating higher likelihood of limb breakage or structural failure, tree too large for area]
43	Silver Maple	49"	Major - major upheaval of adjacent ground, encroachment into roadway and sidewalk, sidewalk removal performed, exposed roots, curb displacement, future worsening of heaving likely due to inadequate tree pit dimensions, provides insufficient space for reconstructed sidewalk or curbing	Good [Fair] - tree is leaning [growing over roadway posing significant safety hazard, cavity on main trunk observed, trunk damage observed, spaced in crown for weak limbs unions creating higher likelihood of limb breakage or structural failure, tree too large for area]

Existing Tree Legend Recommended Action or Treatment

- REMOVE AND DISPOSE OF EXISTING TREE AND ROOT SYSTEM
- MONITOR EXISTING TREE CONDITIONS - REMOVAL AND DISPOSAL OF TREE AND ROOT SYSTEM LIKELY
- MONITOR EXISTING TREE CONDITIONS - RECOMMENDED ACTION TO BE DETERMINED
- MAINTAIN AND PROTECT EXISTING TREE AND ROOT SYSTEM
- EXISTING TREE LOCATED OUTSIDE OF PROJECT AREA - NO ACTION REQUIRED
- TREE IDENTIFICATION NUMBER FOR INVENTORY

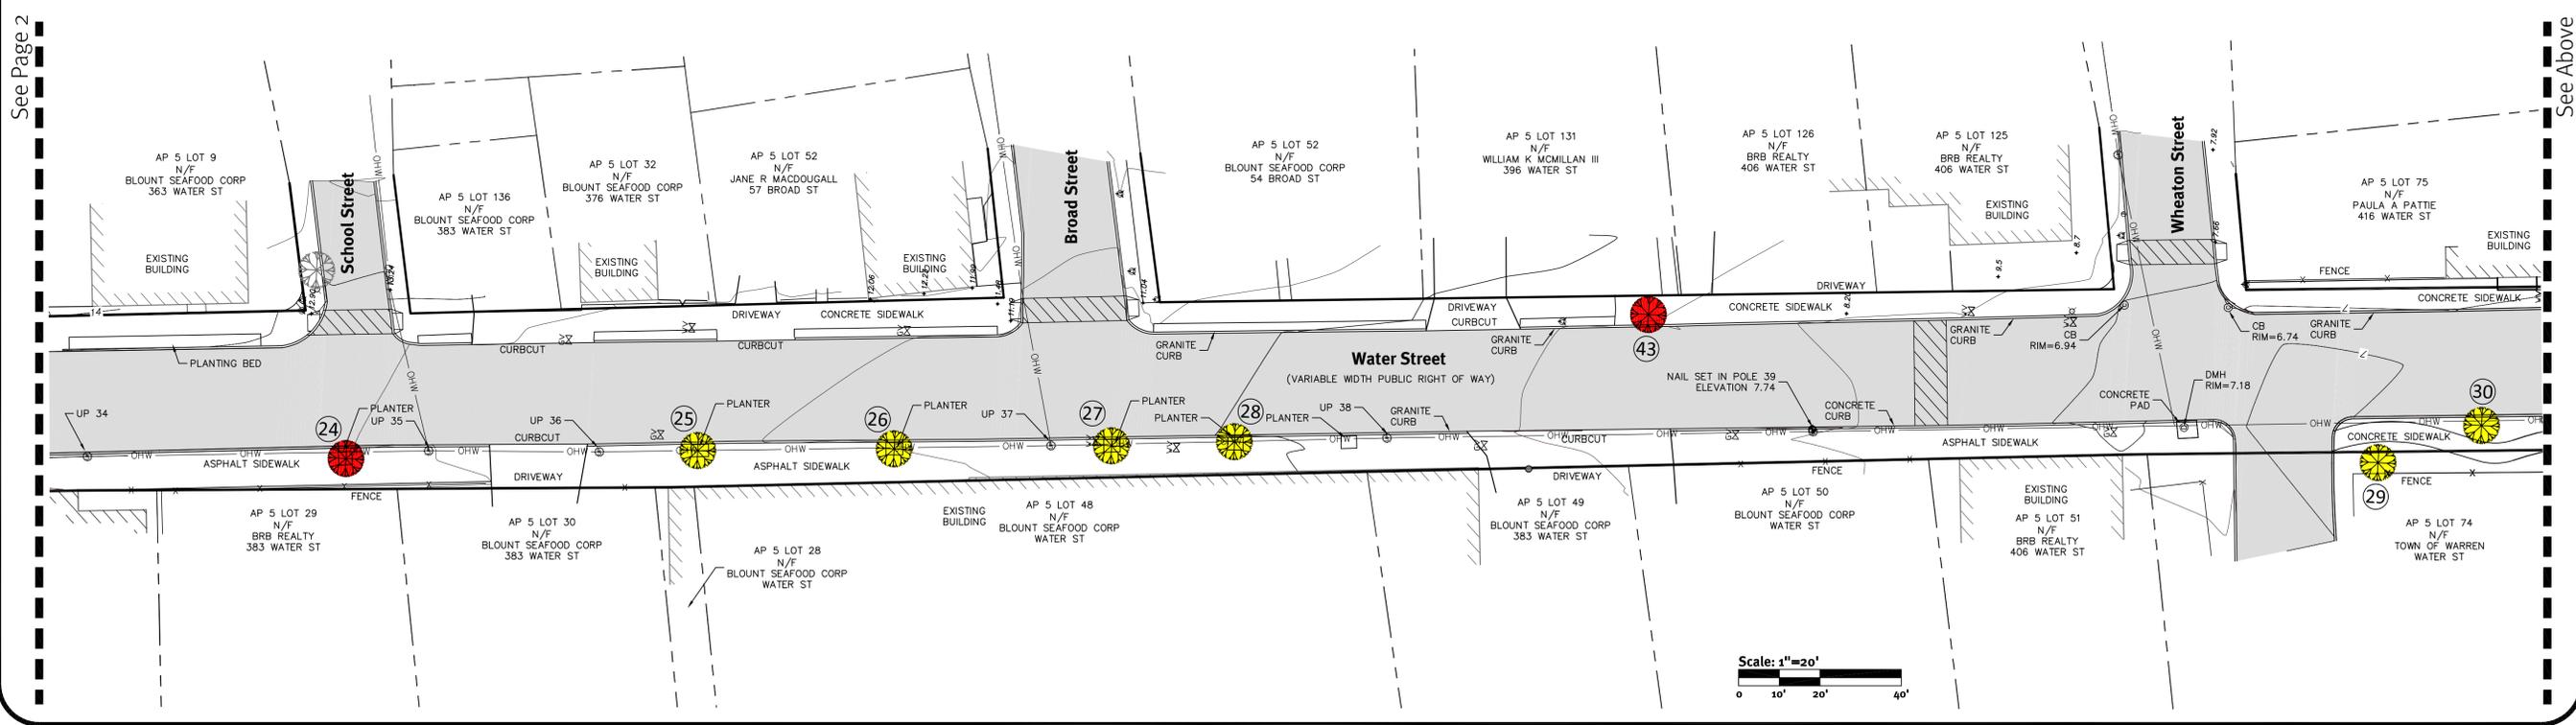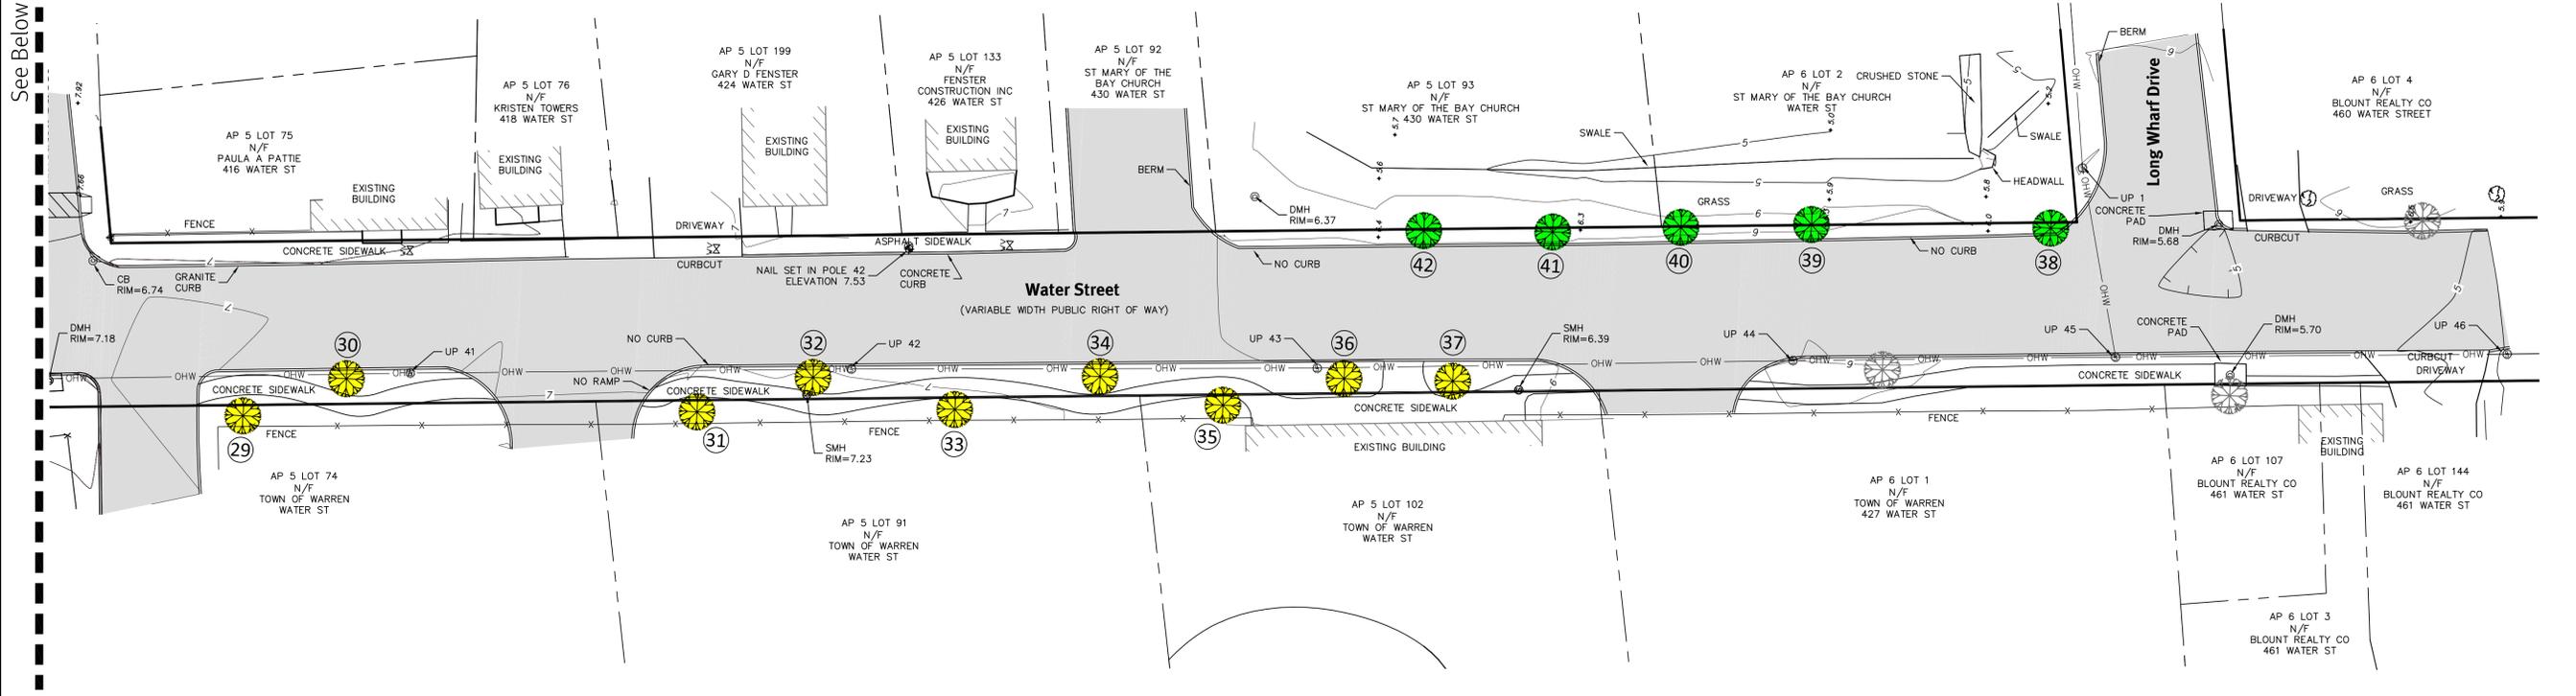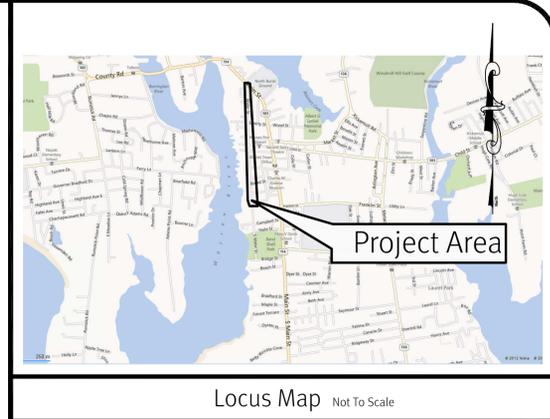

DiPrete Engineering
Two Stafford Court, Cranston, RI 02920
Tel: 401-943-1000 Fax: 401-64-6006 www.DiPrete-Eng.com

Engineers • Planners • Surveyors

Veri | Waterman Associates, Inc.
Landscape Architect:
333 Westminster Street
Fifth Floor
Providence, Rhode Island 02903
401-274-1360
VeriWaterman.com

No.	Date	Description	By:

Tree Inventory Plan
Water Street
Warren, Rhode Island

Client
Town of Warren
514 Main Street
Warren, Rhode Island 02885

DE Job No. 1645-002 Copyright 2012 by DiPrete Engineering Associates, Inc.

SHEET **1** OF 14